


KÄRCHER

makes a difference

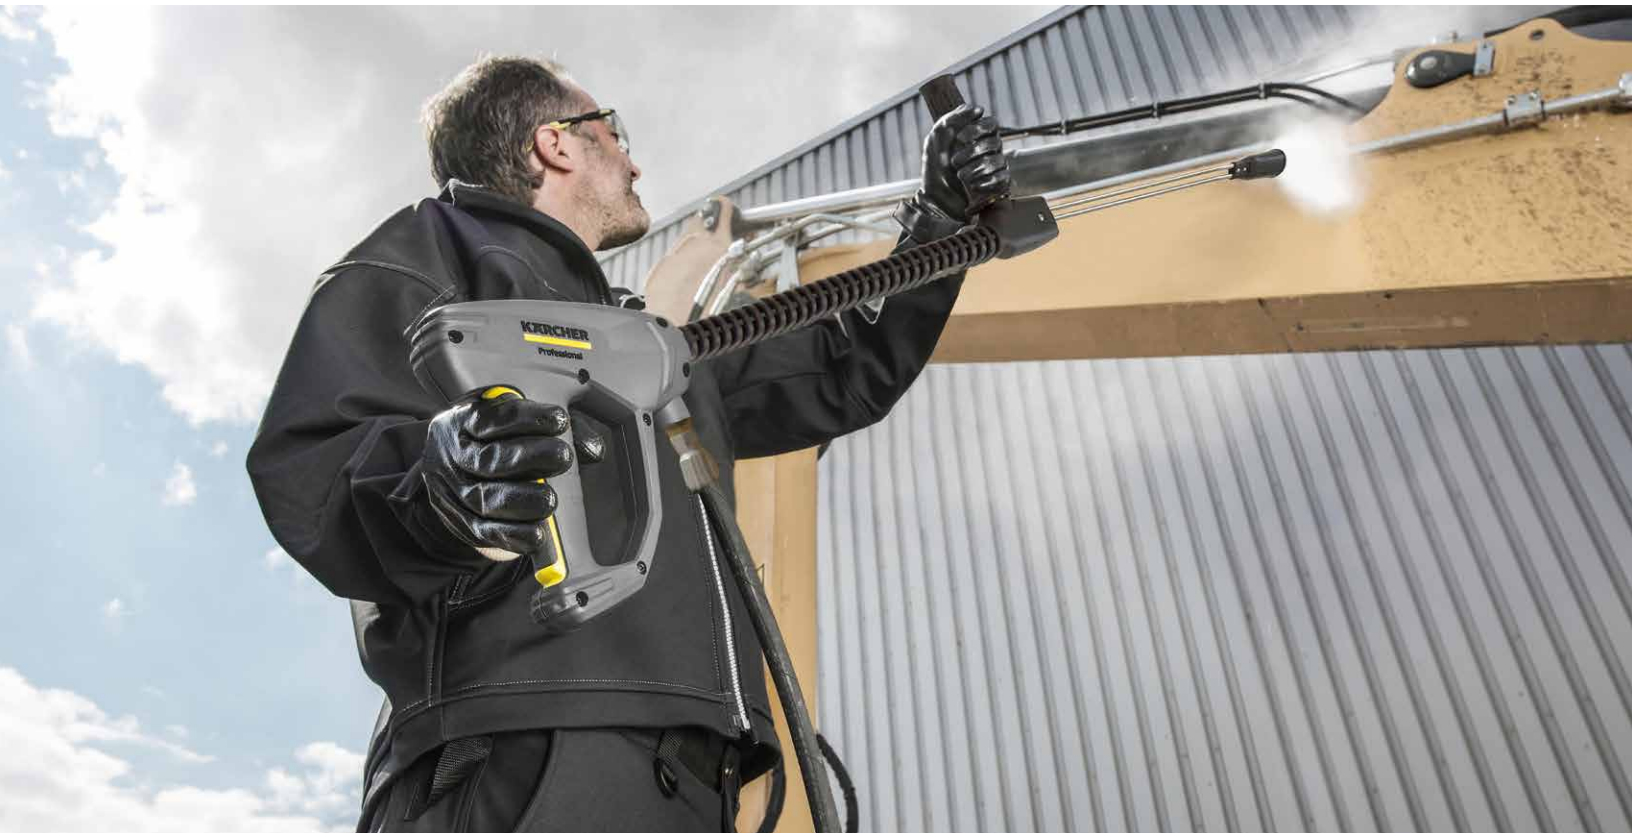

RUGGED GASOLINE OR DIESEL-POWERED PRESSURE WASHER.

Skid mounted and hot water power for commercial use.


PROFESSIONAL | HDS PE/DE/GE CAGE

HDS PE/DE/GE CAGE



The industrial workhorse.

Kärcher Series oil-fired skids are the workhorses of the pressure washer industry. Delivering up to 8.0 GPM of hot water and up to 3500 PSI, these rugged gas and diesel-powered machines are built on an open frame using heavy-gauge 1-1/4" powder coated steel and are ideal for mounting in a truck or on a trailer. The electric-start engine and powerful belt-drive Kärcher KT and KX pumps are isolated from the rest of the machine on a shock-mounted sub-frame to reduce vibration. Steam combination comes standard with all models.



1 Powerful and durable

- Reliable, super-duty gasoline-or diesel-powered engines with electric start.
- High-output burner with transformer for years of reliable and affordable operation.
- Industrial-grade, tri-plunger, oil-bath, direct- drive, Kärcher pump with 7-year warranty.
- 50 ft. of durable, wire braid hose with extended guard for burst protection.
- Heavy-gauge 11/4" steel frame with powder coat finish for all-weather protection.
- Power platform cushioned on 8 vibration isolators for smoother operation and long-life protection to frame and components.
- Insulated Schedule 80 heating coils is made of 1/2-inch, coldrolled, steel pipe; with stainless steel wrap and 5-year warranty.
- VRT100 unloader provides a long life span.
- Winco generator proven to function under the most demanding working conditions.

2 Smart features

- High pressure rupture disc rated to 7000 PSI to protect user against injury.
- Cast iron pulley system with totally enclosed, OSHA-compliant belt guard, and easy-to-adjust TrueTrak belt tension.
- Insulated, high-pressure trigger gun for hours of fatigue-free cleaning.
- 2.5 gal. float tank for high-pressure application of soap and to prevent pump cavitation.
- Water resistant control box with burner on/off switch, adjustable thermo stat and hour meter.
- Easy and ergonomic access to nozzles.
- EASY!Force trigger gun with cruise control like technology uses its own recoil force to hold the trigger down - so, no more sore hands after hours of use.

Technical data and equipment.

Features

- Honda, Vanguard, Kubota engines
- 1-1/4" full steel skid frame
- Burner available in 12V DC or 120V AC
- Kärcher belt-drive tri-plunger pumps
- 1/2" Schedule 80 heating coil
- North American-style accessories
- Stainless steel coil wrap
- Power generator on select models
- Electric start engines
- EASY!Force trigger gun with cruise control like technology uses its own recoil force to hold the trigger down - so, no more sore hands after hours of use.

Technical data

Model	Part No.	GPM	PSI	Drive	CC	Engine	Fuel	Pump	Burner	Ship Weight (lbs)	Ship Dimensions (L x W x H)
HDS 3.9/30 Pe Cage	1.575-600.0	3.9	3000	Belt	389	Honda GX390	Gas	Kärcher KT	12V DC	790	54 x 56 x 55
HDS 4.8/30 Pe Cage	1.575-601.0	4.8	3000	Belt	479	Vanguard 18	Gas	Kärcher KT	12V DC	800	54 x 56 x 55
HDS 4.8/30 Pe Cage	1.575-602.0	4.8	3000	Belt	479	Vanguard 18	Gas	Kärcher KT	120V AC	945	54 x 56 x 55
HDS 4.7/35 Pe Cage	1.575-603.0	4.7	3500	Belt	688	Honda GX630	Gas	Kärcher KT	12V DC	855	54 x 56 x 55
HDS 4.7/35 Pe Cage	1.575-604.0	4.7	3500	Belt	688	Honda GX630	Gas	Kärcher KT	120V AC	890	54 x 56 x 55
HDS 5.6/35 Pe Cage	1.575-605.0	5.6	3500	Belt	688	Honda GX660	Gas	Kärcher KT	12V DC	852	54 x 56 x 55
HDS 5.6/35 Pe Cage	1.575-606.0	5.6	3500	Belt	688	Honda GX660	Gas	Kärcher KT	120V AC	970	54 x 56 x 55
HDS 5.6/35 De Cage	1.110-622.0	5.4	3500	Belt	1123	Kubota D1105-E3B	Diesel	Kärcher KT	12V DC	1214	54 x 56 x 55
HDS 5.6/35 De Cage	1.110-623.0	5.4	3500	Belt	1123	Kubota D1105-E3B	Diesel	Kärcher KT	120V AC	1300	54 x 56 x 55
HDS 8.0/30 Ge Cage	1.575-611.0	8.0	3000	Belt	688	Honda GX660	Gas	Kärcher KX	12V DC	805	54 x 56 x 55
HDS 8.0/30 Ge Cage	1.575-612.0	8.0	3000	Belt	688	Honda GX660	Gas	Kärcher KX	120V AC	865	54 x 56 x 55

Standard EASY!Force Accessory

Order No.	Description
8.756-481.0	EASY!Force trigger gun (North American Model) - zero force required. Standard 1/4" connection for wand, 3/8" connection for hose.

Options (factory installed)

Order No.	Description
9.801-003.0	Wheel kit assembly (gas engine skid only)
8.903-430.0	Stackless flue adapter

Options (field installed)

Order No.	Description
8.904-051.0	Battery installed on Honda GX630 and GX660 models only

Please contact us for more information:

North America

4555 Airport Way
Denver, CO 80239
U.S.A.

Phone 888-805-9852
Fax 800-248-8409

www.karcher.com/us

Canada

6535 Millcreek Drive
Unit 67
Mississauga, ON L5N 2M2
Canada

Phone 905-672-8233
Fax 905-672-3155

www.karcher.ca